




F06-06-315 (J305)

Flooded Deep Cycle Battery



Left - negative Right - positive

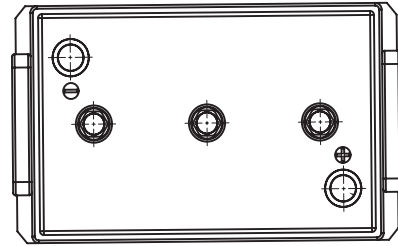

Electrical Specifications

C5 Capacity	270Ah
C20 Capacity	315Ah
Voltage	6V
80% DOD Voltage Cutoff	5.6V
Self Discharge	Less than 3% per month (20°C/68°F)
Charge Temperature	Min: -10°C (14°F) / Max: 50°C (122°F)
Discharge Temperature**	Min: -40°C (-40°F) / Max: 50°C (122°F)
Storage	Min: -20°C (-4°F) / Max: 60°C (140°F)

Features

- Flooded bloc batteries

- Good high current performance for extreme operating conditions

- 1000 cycles (IEC 61427 / 60896-21/22)

- Recyclable

- Long cycle life

- Low self discharge rate

Mechanical Specifications

Industry Reference	J305	
Length (A)	11.9 in	302 mm
Width (B)	7.0 in	178 mm
Height (C)	13.6 in	346 mm
Height (D)	13.7 in	349 mm
Weight	89.3 lbs	40.5 kgs
Terminal (Opt'l)	M8	
Cell(s)	3	
Electrolyte	Flooded	
Terminal Torque Nm	8	

NOTE: There is a tolerance of +/-2%.

Terminal Options Available:


- M8
- A-Pole
- Dual
- Stud

F-M8




8Nm

A-Terminal




Positive Negative

Dual

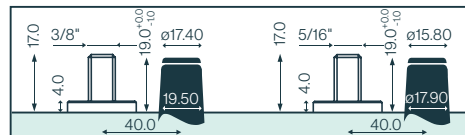

Positive Negative

Stud



Positive & Negative